

Hyperfree

Drycoolers



Hyperfree is the ideal solution where water is required at temperatures above the ambient.

All models are easy to install with low running and maintenance costs, designed for outdoor installation, with IP54 grade protection and epoxy coated galvanized aluminium frames. The new generation of Parker Hiross dry coolers is a competitive product Line of robust construction, offering excellent performance and an outstanding integration with other components. Highly-efficient fan motors combine excellent sound characteristics and low energy consumption.



Process cooling applications:

- Extruders
- Welding Engineering
- Plastics Processing
- Injection Moulding
- Surface Processing
- Blow Moulding Machines
- Thermoform Machines
- Cutting Machine Tools
- Food & Beverage Industry
- Coating Systems
- Chemical and Pharmaceutical
- Electroplating Baths

Product Features:

- Modular design
- Easy to upgrade after installation
- Low maintenance costs
- Efficient and long life components
- Good heat transfer
- Space saving design
- High ratio performance-cost
- Strong construction
- Solid aspect
- Superior quality finishing
- Reinforced feet support
- No water consumption
- No corrosion phenomena
- No Legionella
- High flexibility according to working conditions
- Power absorption proportional to effective necessities
- Low operating costs/Low employed power
- No pollution, no fouling
- Plug & play solutions

Innovative Parker Hiross dry coolers combine an excellent heat transfer with minimized cooler dimensions, thanks to the fin corrugation developed, combined with advanced cross-fin tubes. For double fan row units, double connections provide the possibility of two completely independently operating heat exchangers.



Versions:


- horizontally mounted coil configuration
- vertically mounted coil configuration
- compact “V” configuration
- different noise levels available on request



Options:

- Support feet, for horizontal installation
- Junction box for common power connection
- Control panel and cabling
- Control panel with fan step control
- Control panel with stepless control (fan speed regulation)
- Vibration dampers
- Spray water system
- Coil treatments for aggressive environment

Freecooling

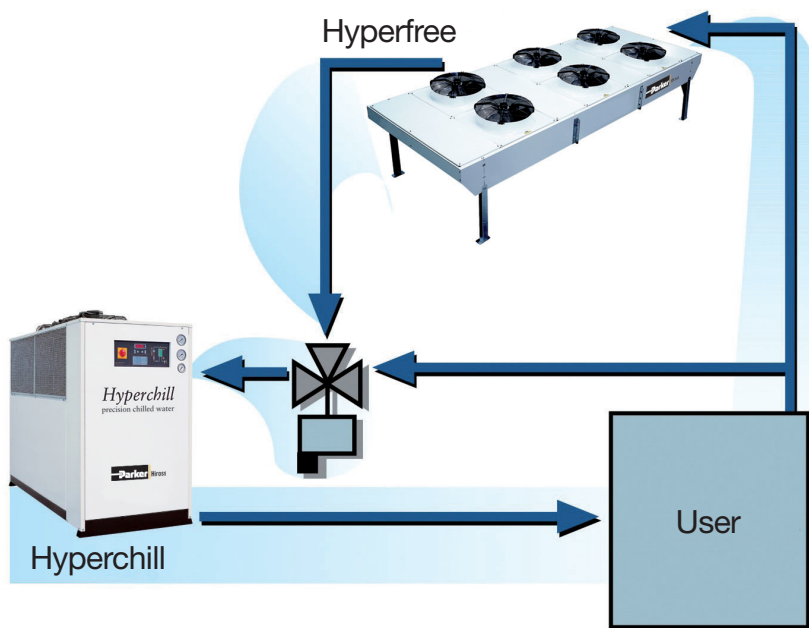


When used in combination with Hyperchill water chillers, Hyperfree drycoolers guarantee an effective and extremely efficient solution.

A freecooling system makes it possible to switch from Hyperfree in the colder periods to Hyperchill in the warmer periods, resulting in significant energy savings and guaranteeing fresh water supply at the required temperature in any condition, optimising the running costs.

Technical data

Model	Cooling Capacity*	Water Flow	Water pressure drops	Fans n° x D	Air flow	Max abs. power (1 fan)	Noise level	Conn. IN/OUT	Dimensions	Weight
	kW	m³/h	kPa	n° x mm	m³/h	kW	db (A)	in	(A x B x C x D)	kg
HDC040	36,8	6,4	35	2x500	15203	0,7	47	1"	830x850x2042x480	84
HDC060	56,0	9,8	57	3x500	22802	0,7	49	1"1/4	830x850x2942x480	123
HDC080	75,5	13,1	52	3x500	20232	0,7	49	1"1/2	830x850x2942x480	151
HDC110	101,0	17,5	61	4x500	27000	0,7	50	2"	830x850x3842x480	216
HDC 140	137,6	23,7	17,3	2x630	33848	2,6	59	2"	1255x1225x3260x900	381
HDC 165	164,1	28,2	44,5	3x630	53118	2,6	61	2"	1255x1225x4655x900	463
HDC 190	192,1	33	39,7	3x630	51951	2,6	61	2"	1255x1225x4655x900	505
HDC 210	206,9	35,6	30,4	3x630	50709	2,6	61	2"1/2	1255x1225x4655x900	550
HDC 250	247,4	42,5	44,4	2x1000	60529	3,6	58	2"1/2	1494x1295x4655x900	643
HDC 345	344,5	59,2	8,3	3x1000	93167	3,6	60	3"	1494x1295x6755x900	795
HDC 440	438,1	75,3	48,7	4x1000	112224	3,6	60	2x3"	2290x1295x4655x900	967
HDC 510	506,6	87,1	72,8	4x1000	183482	3,6	62	2x4"	2290x1295x6755x900	1160
HDC 580	579,7	99,7	9,7	6x1000	175746	3,6	62	2x4"	2290x1295x6755x900	1282
HDC 660	655,1	112,7	71,2	6x1000	168088	3,6	62	2x4"	2290x1295x6755x900	1416
HDC 710	714,4	122,9	18,6	8x1000	244541	3,6	63	2x4"	2290x1295x8855x900	1561
HDCV 490	486,1	83,6	30,5	6x800	123000	2	58	2 x DN80	2230x2210x4260	1360
HDCV 540	535,5	92,1	34,2	6x1000	185200	3,6	64	2 x DN80	2230x2210x4260	1393
HDCV 620	622,6	107,1	34	6x1000	178100	3,6	64	2 x DN80	2230x2210x4260	1513
HDCV 720	715,1	123,3	42	8x1000	247000	3,6	65	2 x DN80	2230x2210x5570	1749
HDCV 820	823,2	141,6	32	8x1000	237700	3,6	65	2 x DN80	2230x2210x5570	1923

* At water inlet/outlet temperature=40 °C/35 °C, ambient temperature 25 °C, glycol 0 %.

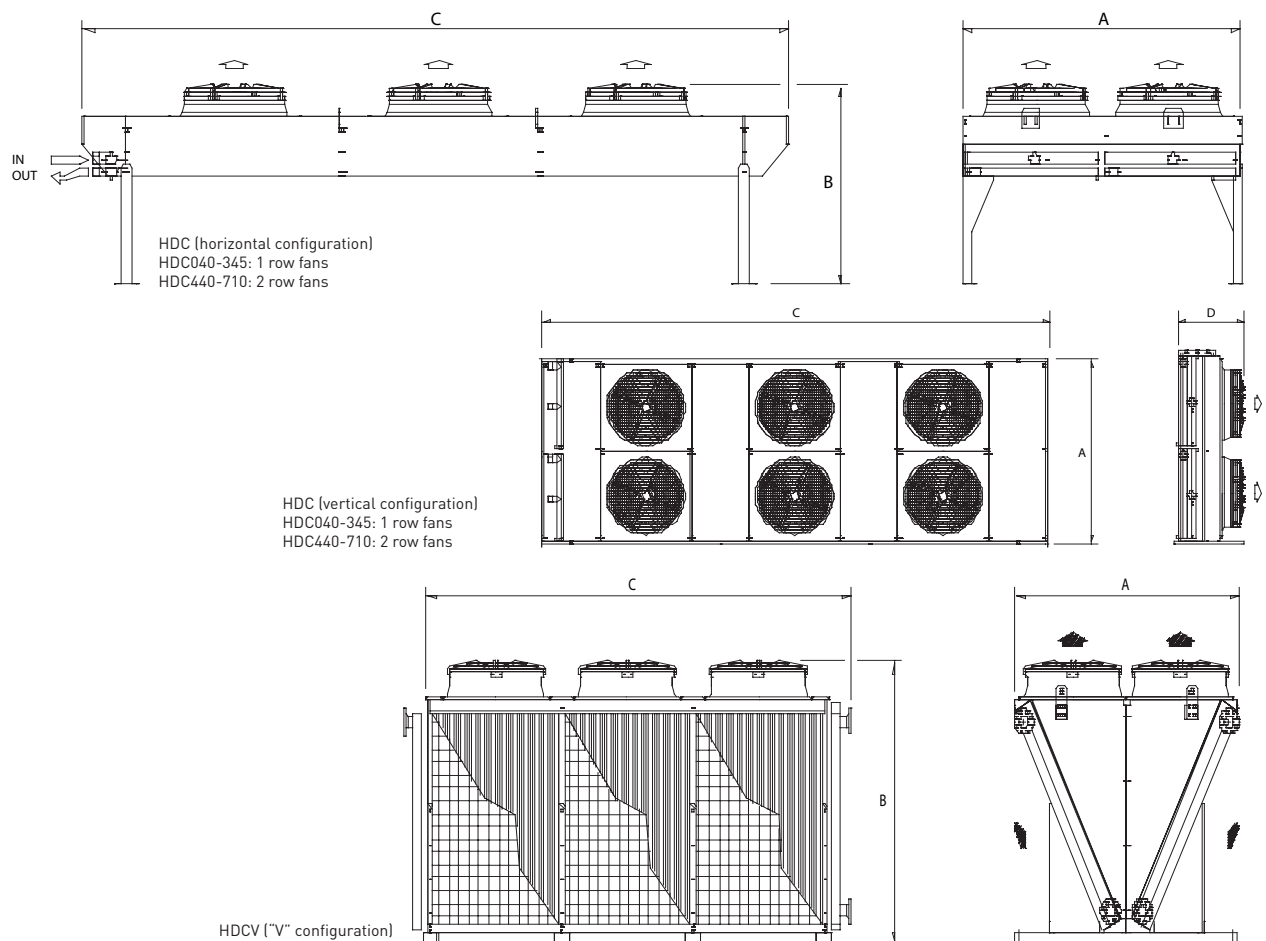

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener
Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000-99

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 800 727 5374

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200